

<b>APPLICATIONS</b>	Heating, Cooling, Steam applications
<b>MAX. FLOWRATE</b>	150 m <sup>3</sup> /h (with water)
<b>MAX. NUMBER OF PLATES</b>	403
<b>FRAME</b>	PN10, PN16 (standard PN16) on request PN25


<b>MATERIALS</b>	<b>FRAME</b>	Painted carbon steel Stainless steel AISI 304 – AISI 316
	<b>PLATES</b>	Stainless steel AISI 304 – AISI 316 titanium, incoloy, monel, hastelloy
	<b>GASKETS</b>	NBR, EPDM, EPM, FKM, Silicone
	<b>CONNECTIONS</b>	Carbon steel, stainless steel

### DIMENSIONS

NOMINAL PRESSURE	PN10	PN16
A	455	468
B	230	230
C	1091	1091
D	720	720
F	N° of plates x 3,10	N° of plates x 3,10
G	DN100	DN100
H	200	200
S1 / S2	30 / 30	40 / 35
unit. surface (m <sup>2</sup> )	0,224	0,224
Channel Vol. (l)	0,583	0,583
Plate weight (Kg)	1,35	1,35
Plate thickness (mm)	0,5	0,5
Frame weight (Kg)	285	360
Boltings	N°10 M20 + N°4 M20	N°10 M24 + N°4 M20

N°OF PLATES	105	151	197	243	289	337
E	750	1000	1250	1500	1750	2000

### DIMENSIONS

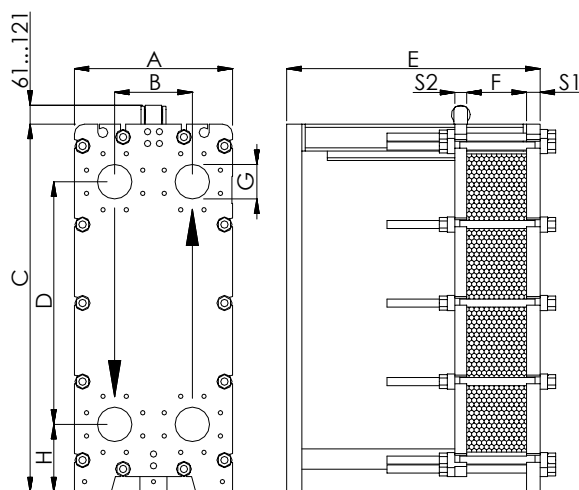

### CONNECTION TYPE

