

APPLICATIONS	Heating, Cooling, Steam applications
MAX. FLOWRATE	330 m ³ /h (with water)
MAX. NUMBER OF PLATES	399
FRAME	PN10, PN16 (standard PN16) on request PN25


MATERIALS	FRAME	Painted carbon steel Stainless steel AISI 304 – AISI 316
	PLATES	Stainless steel AISI 304 – AISI 316 titanium, incoloy, monel, hastelloy
	GASKETS	NBR, EPDM, EPM, FKM, Silicone
	CONNECTIONS	Carbon steel, stainless steel

DIMENSIONS

NOMINAL PRESSURE	PN10	PN16
A	582	600
B	296	296
C	1394	1394
D	973	973
F	N° of plates x 3,10	N° of plates x 3,10
G	DN150	DN150
H	225	225
S1 / S2	40 / 35	50 / 45
unit. surface (m ²)	0,425	0,425
Channel Vol. (l)	1,09	1,09
Plate weight (Kg)	2,4	2,4
Plate thickness (mm)	0,5	0,6
Frame weight (Kg)	540	700
Boltings	N°12 M24 + N°4 M24	N°12 M30 + N°4 M24

N°OF PLATES	105	151	197	243	289	337
E	760	1010	1260	1510	1760	2010

DIMENSIONS

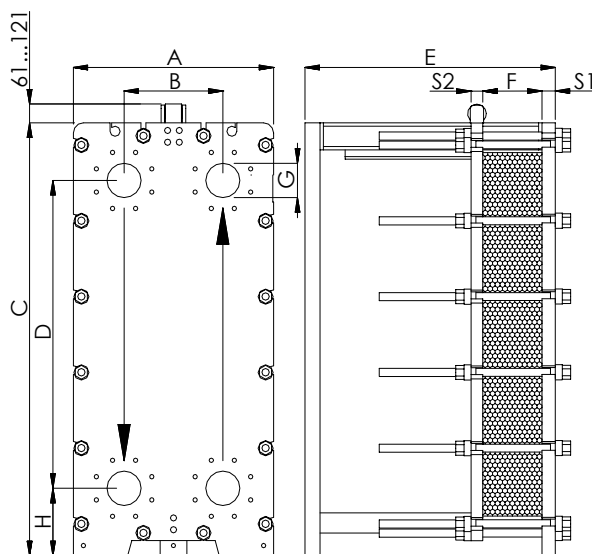

CONNECTION TYPE

