

<b>APPLICATIONS</b>	Heating, Cooling, Steam applications
<b>MAX. FLOWRATE</b>	600 m <sup>3</sup> /h (with water)
<b>MAX. NUMBER OF PLATES</b>	389
<b>FRAME</b>	PN10, PN16 (standard PN16) on request PN25


<b>MATERIALS</b>	<b>FRAME</b>	Painted carbon steel Stainless steel AISI 304 – AISI 316
	<b>PLATES</b>	Stainless steel AISI 304 – AISI 316 titanium, incoloy, monel, hastelloy
	<b>GASKETS</b>	NBR, EPDM, EPM, FKM, Silicone
	<b>CONNECTIONS</b>	Carbon steel, stainless steel

### DIMENSIONS

NOMINAL PRESSURE	PN10	PN16
A	763	773
B	396	396
C	1737	1737
D	1146	1146
F	N° of plates x 3,10	N° of plates x 3,10
G	DN200	DN200
H	262,5	262,5
S1 / S2	50 / 45	65 / 55
unit. surface (m <sup>2</sup> )	0,67	0,67
Channel Vol. (l)	1,82	1,82
Plate weight (Kg)	3,4	3,4
Plate thickness (mm)	0,5	0,6
Frame weight (Kg)	1030	1300
Boltings	N°10 M30 + N°4 M30	N°10 M36x3 + N°4 M30

N°OF PLATES	93	139	185	231	277	323
E	715	965	1215	1465	1715	1965

### DIMENSIONS

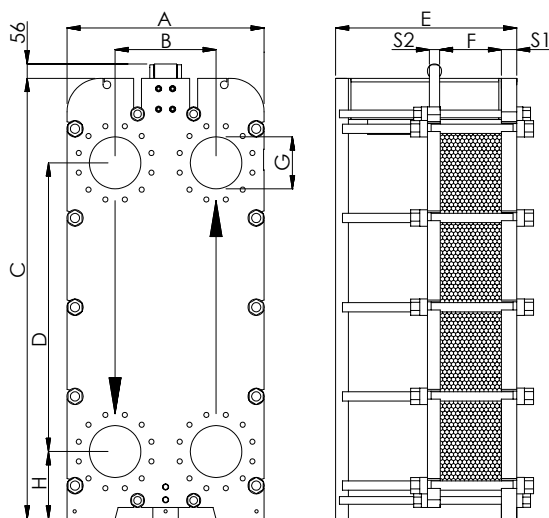

### CONNECTION TYPE

